


DIAMETRI DI AVVOLGIMENTO

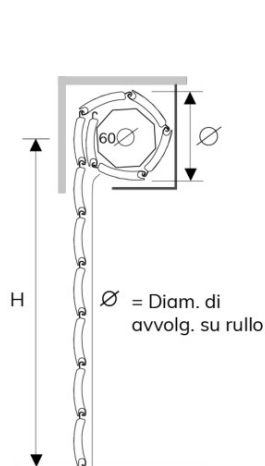


Su rullo Ø 60 mm


H telo -> diametro

1000 -> 145
1200 -> 150
1300 -> 155
1400 -> 160
1500 -> 165
1600 -> 170
1700 -> 175
1800 -> 175
1900 -> 180
2000 -> 185
2200 -> 190
2400 -> 190
2600 -> 200
2800 -> 205
3000 -> 210
3300 -> 220


misure in mm

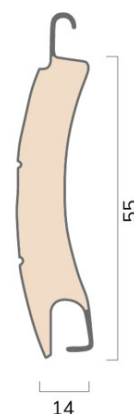


GUIDE COMPATIBILI




ALLU0830




ALLU2258




ALLU0774



ALLU0832




ALLU0954




ALLU0207


PER SOSTITUZIONE



ALLU1028




ALLU2230




ALLU0829


TERMINALI COMPATIBILI



in gomma
10 x 10 mm




in allum. 14 x 55
55 mm




in allum. 14 x 55
ad inversione
55 mm

CATENACCIOLI



caten. intermedio di
sicurezza per stecca




catenacciolo
per terminale
ACGE3752 150 mm
ACGE0721 500 mm
ACGE0722 1000 mm

ATTACCHI COMPATIBILI



ACGE0498



blocco di sicurezza
anti-sollevamento
Ø40 - ACGE5740
Ø60 - ACGE0608
Ø70 - ACGE3914

Le misure indicate possono avere delle lievi variazioni dovute ai normali processi produttivi.