


DIAMETRI DI AVVOLGIMENTO

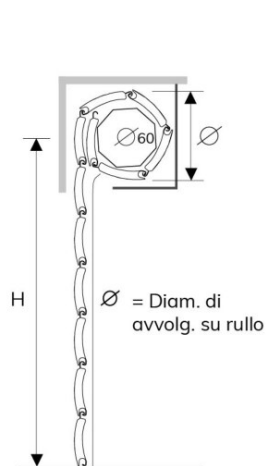

Su rullo ø 60 mm
H telo -> diametro





1000 -> 155
1200 -> 165
1300 -> 170
1400 -> 175
1500 -> 180
1600 -> 185
1700 -> 190
1800 -> 190
1900 -> 195
2000 -> 200
2200 -> 210
2400 -> 220
2600 -> 230
2800 -> 240
3000 -> 245
3300 -> 255

misure in mm

PROFILO





GUIDE COMPATIBILI




ACGE3192 - H 1600 mm
ACGE3861 - H 1800 mm
ACGE3862 - H 2400 mm
ACGE3863 - H 2600 mm
ACGE3864 - H 2800 mm
ACGE3865 - H 3000 mm


PER SOSTITUZIONE



CATENACCIOLI




caten. intermedio di
sicurezza per stecca
ACGE3754




catenaccio
per terminale
ACGE3752 150 mm
ACGE0721 500 mm
ACGE0722 1000 mm


TERMINALI COMPATIBILI



in ferro
11 x 19 mm




in PVC Super
13,2 x 20,5 mm




in gomma
10 x 10 mm



in PVC 55
55 mm



in alluminio 14x55
55 mm



per avvolgibili
7 x 8 mm

BLINDATURA

Le misure indicate possono avere delle lievi variazioni dovute ai normali processi produttivi.